



## IM2435

### Storm Case

- MEETS AIRLINE REGULATIONS FOR CARRY-ON LUGGAGE
- Guaranteed For Life
- Lightweight Strong HPX® Resin
- Watertight, crushproof and dustproof
- O-ring seal
- In-Line Wheels
- Two Press & Pull Latches
- Double-Layered, Soft-grip Handle
- Two stainless steel padlock protectors
- 38" Retractable Extension Handle

#### INTERIOR (L x W x D)

17.5" x 6.5" x 15.5" (44.4 x 16.5 x 39.4 cm)

#### EXTERIOR (L x W x D)

18.63" x 9.25" x 16.5" (47.3 x 23.5 x 41.9 cm)

**BODY:** Injection Molded HPX® high performance resin

**FOAM:** 1.3/1.35 polyester

**LATCH:** Valox - PBT polybutylene terephthalate

**PURGE BODY:** Valox - PBT polybutylene terephthalate


**LID O-RING:** Silicone Sponge

**PURGE VENT:** Gortex membrane

**PINS:** Stainless Steel or Aluminum

**PURGE O-RING:** Buna-N , 50-60 Durometer Shore A

#### COLORS

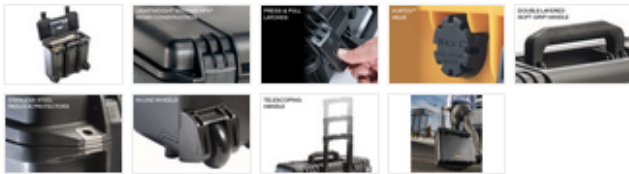

**IM2435-DIV-LIDORG**  
Divider Set & Lid Organizer

**IM2435-FOAM**  
5 pc. Replacement Foam Set

**BUOYANCY:**  
56.7 lbs (25.72 kg)

**RANGE TEMPERATURE**  
-20 / 140° F (-29 / 60° C)

**FOAM PROPERTIES**  
**Lid Layer 1**  
2" (5.1 cm) Convolute  
**Base Layer 3**  
2.31" (5.9 cm) Diced  
**Base Layer 4**  
1.88" (4.8 cm) Diced  
**Base Layer 5**  
0.5" (1.3 cm) Pad

**MOBILITY OPTIONS**  
 Retractable Handle YES  
 Maximum Handle Load TBD  
 Number of Wheels 2

**CERTIFICATES**  
• ATA 300

**MINIMUM PACK:** 1 ea.

**MASTER PACK:** 1 ea.  
[Test Summary Sheet](#)

**INTERIOR CUBIC VOLUME:**  
1.02 cubic feet (28.89 cubic decimeter)

**LID DEPTH:**  
2" (5.1 cm)

**BOTTOM DEPTH:**  
13.5" (34.3 cm)

**TOTAL DEPTH:**  
15.5" (39.4 cm)

**WEIGHT WITH FOAM:**  
11.15 lbs (5.06 kg)

**WEIGHT W/O FOAM:**  
10 lbs (4.54 kg)